




# XPOLY8

## Floor Stripper

**Benefits:**

- High performance floor stripper
- Fast acting therefore saving time
- Liquefies old sealers on contact
- Effective on most types of flooring

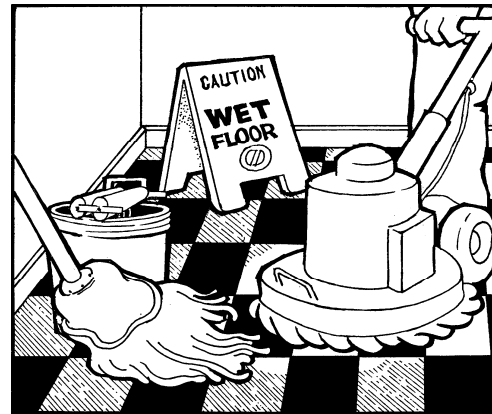

**XPOLY8** is a new generation floor stripper designed to rapidly liquefy and emulsify old sealers for easy removal with an auto-scrubber or mop and bucket. **XPOLY8** is a powerful dual action floor stripper designed to remove metalised and non-metalised floor finishes. **XPOLY8** is a low odour, fast acting, labour saving method for removing floor sealers/finishes with a minimum of scrubbing.

**XPOLY8** contains a blend of glycol solvents that synergise with a rapid penetration dual chain emulsifier to penetrate the most stubborn old polish films. Make sure to keep the surface wet at all times when stripping. **XPOLY8** can be used on vinyl, vinyl asbestos, rubber, no-wax linoleum, lino tile, marble, terrazzo, ceramic quarry tiles and most types of flooring.

**Directions for use:**

Depending upon the degree of sealer on the floor, **XPOLY8** can be diluted as follows:

	Dilution
Heavy Build up	250mL/L of water
Moderate Build up	125mL/L of water

Add recommended amount of **XPOLY8** to cold water and apply liberally to the floor. Allow to work for 3 to 5 minutes, being sure to keep the floor wet. Floor will be slippery when it's wet. Scrub the floor using a black pad. Pick up the dissolved sealer. Rinse the floor with clean water and allow the floor to dry.

**Note:** Avoid prolonged contact with metal surfaces.

For further information refer to the **XPOLY8** Material Safety Data Sheet (MSDS) located on the Whiteley Industrial website: [www.whiteley.com.au](http://www.whiteley.com.au)

© This document remains property of Whiteley Industrial (a division of Whiteley Corporation Pty Ltd). Alterations are not permitted without prior written authorisation from Whiteley Corporation.

*XPOLY8 Technical Bulletin - 0209*